




## PRODUCT INFORMATION SHEET: SLP – FOAM AS

Type:	Density:	Thickness:
SLP – FOAM AS, black	28 kg/m <sup>3</sup>	10 – 40 mm
SLP – FOAM AS, black	30 kg/m <sup>3</sup>	10 – 50 mm
SLP – FOAM AS, white	30 kg/m <sup>3</sup>	10 – 40 mm
SLP – FOAM AS, marine	30 kg/m <sup>3</sup>	25 – 40 mm



### Description:


SLP- FOAM AS is an oil and water resistant polyurethane foam with a barrier film of 0.025 mm. In this series is also the SLP-FOAM AS marine where the barrier film is replaced by a film white marine finishing. It is the polyurethane barrier film and the marine finishing that create the oil and water resistance.

### CE – Certificate:

SLP-FOAM AS materials are in compliance with directive 94/25/EC as amended by 2003/44/EC (ISO 4589-3: 1996) which makes them suited for use in Yacht Building.

### Application:

SLP-FOAM AS is a sound absorption sheet to be used in places where resistance to oil and water is of high importance. The finishing protects the foam from aging and provides a smooth surface. Examples of applications are yacht engine rooms, compressors, air ducts, generators, pumps, etc.

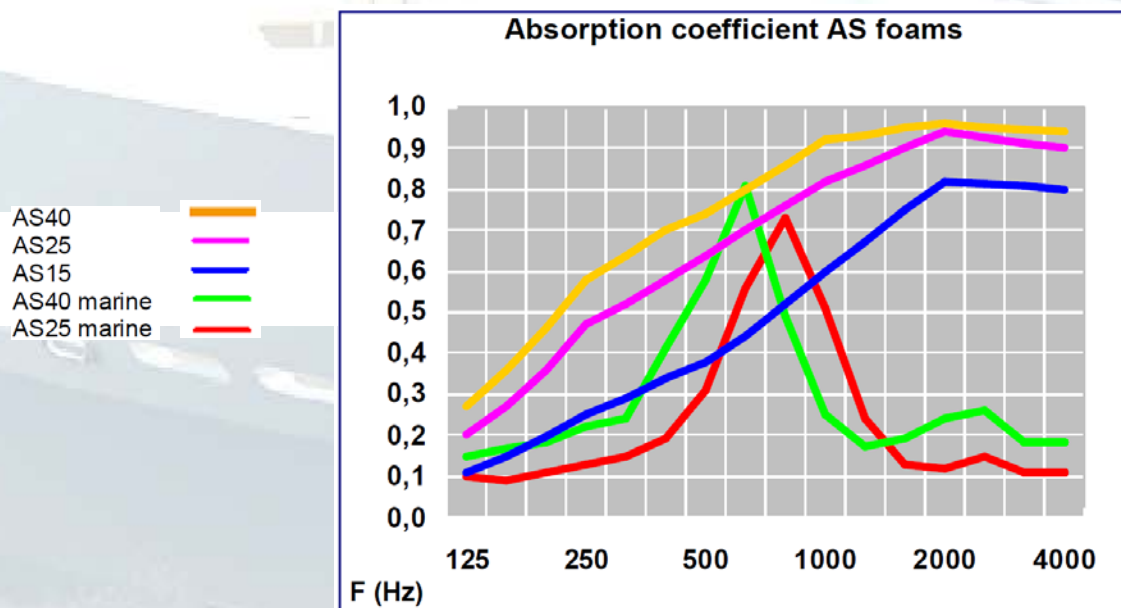

### Silent Line Products:

For additional information please visit our website: [www.silentlinegroup.com](http://www.silentlinegroup.com) or contact us at [sales@silentlinegroup.com](mailto:sales@silentlinegroup.com)