



PRODUCT INFORMATION SHEET: SLP – SONIC AGLP

- | | |
|--|--|
| <ul style="list-style-type: none"> • Pressure washable • Rigid • Age resistant • Good sound absorption | <ul style="list-style-type: none"> • High temperatures • Easy to form • Mechanical application • No static electricity |
|--|--|



Description:

SLP- SONIC AGLP is a self-supporting sound absorbing sheet which operates by micro-perforation to give an optimum airflow resistance for absorbing sound. SLP- SONIC AGLP is because of the large operating temperatures from -50°C to circa 200°C well suited for applications in the combination as noise and heat shield.




Application:

SLP-SONIC AGLP is mounted with a small air gap between the absorption sheet and the structure. The absorptions at low frequencies can be optimized with variations in the air gap or use of Stonewool. SLP- SONIC AGLP is mainly applied in places where there are high standards for oil and water resistance, hygiene and resistance to heat.

Sound absorption coefficient (%) to I.S.O. 10534

AGLP, 75 mm gap filled with Rockwool
 AGLP, 75 mm gap met 50 mm Rockwool
 AGLP, 50 mm gap without filling
 AGLP, 30 mm gap without filling

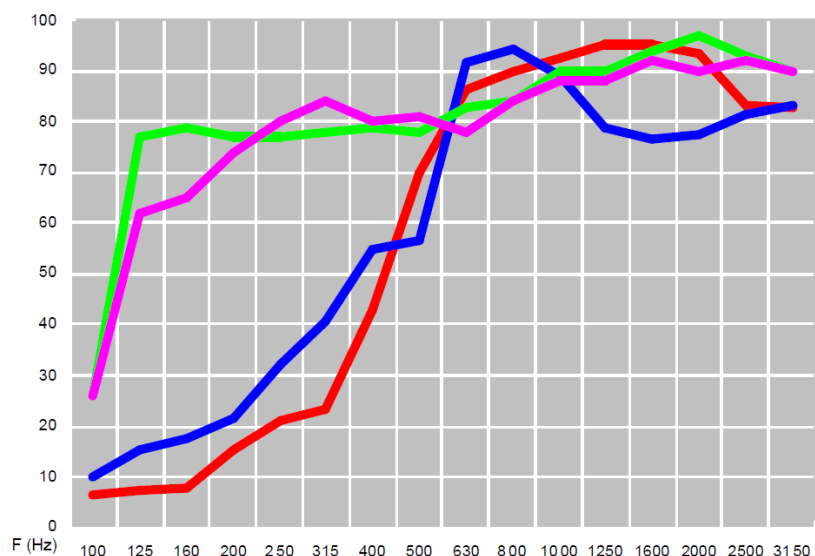

Silent Line Products:

For additional information please visit our website: www.silentlinegroup.com or contact us at sales@silentlinegroup.com